


LEANDYNAMIC

Steps of construction


SESA SYSTEMS has developed two innovative connectors that are essential for customised dynamic storage. These two unique multi-directional connectors enable all aluminium profiles to be connected quickly and easily, making them suitable for all applications.

LOGISTICS

STEP 1: DEFINE THE NUMBER OF BINS

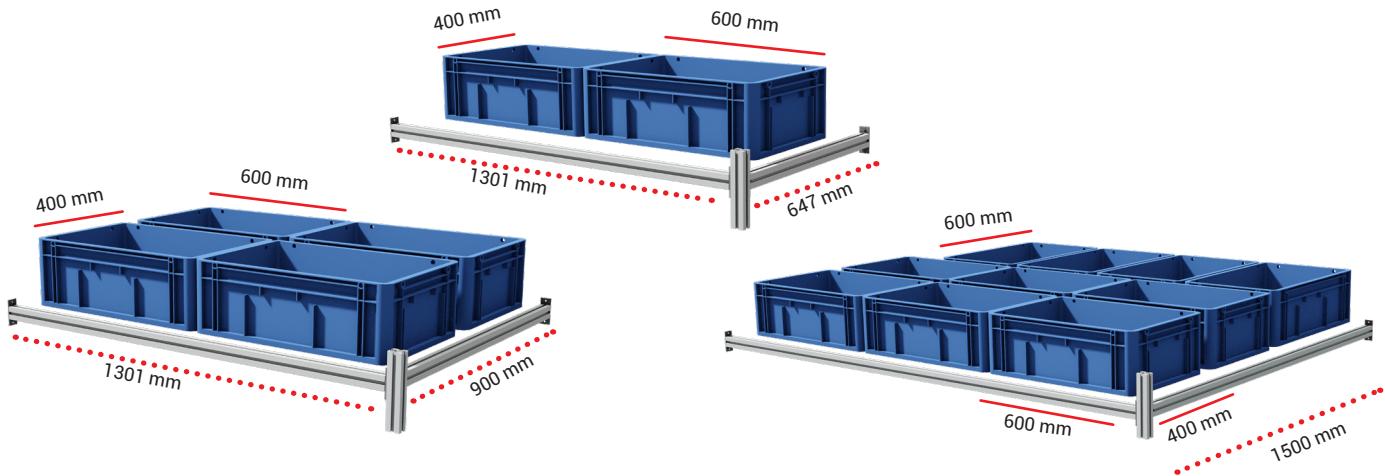

STEP 2 : DEFINE ALUMINIUM STRUCTURE

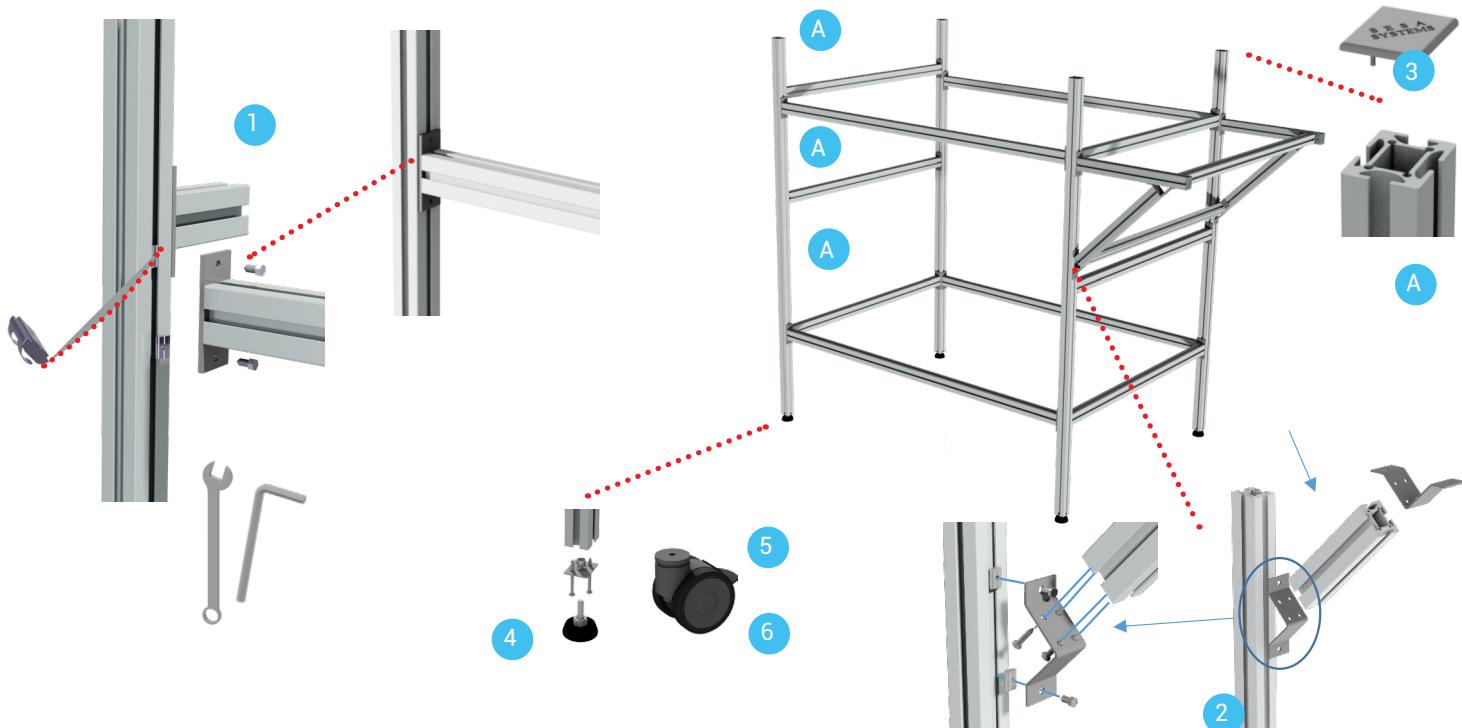

	CODE	DESIGNATION	LEAD TIME
A	690100	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 150 mm/L 5.90 inch	5 days
A	690108	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 415 mm/L 16.33 inch	5 days
A	690102	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 647 mm/L 25.47 inch	5 days
A	690103	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 900 mm/L 35.43 inch	5 days
A	690104	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 1301 mm/L 51.22 inch	5 days
A	690105	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 1500 mm/L 59.05 inch	5 days
A	690106	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 1965 mm/L 77.36 inch	5 days
A	690107	Aluminium profile section 40 x 32 mm/1.25 x 1.57 Inch L 3000 mm/L 118.11 inch	5 days
1	690120	Set of 4 universal connectors (with screws)	5 days
2	690121	Set of 4 angle connectors (with screws)	5 days
3	544060	Set of 8 stackable plastic cap 40 x 32 mm/1.25 x 1.57 Inch	5 days
4	544067	Set of 4 floor support adjustable feet M10	5 days
5	690130	Set of 4 swivel roller wheels with brakes Ø 100 mm / 80 mm rise (Ø 3.94 Inch / 3.15 Inch rise) with standard insert	5 days
6	541054	Set of 4 swivel roller wheels with brakes Ø 125 mm / 105 mm rise (Ø 4.92 Inch / 4.43 Inch rise) with reinforced insert	5 days